



FIRE ALARM DETECTOR



Photoelectric Smoke Detector



CL-180

Description


- The Detector is Photoelectric Smoke Detector. It was designed on theory in which the light emits diffusively to various directions when reflecting onto the smoke cell.
- Soon as the detector sensors the desired density of the smoke, after several times of confirmation as a flame smoke, it then transfers into signal and transmits to signal receiver or control disc to change the fire alarm or activate the equipment of fire resistance gate and smoke expellantion value.

Features

- For security system.
- Two-wire low current design 16 ~ 32 VDC range
- Base options for supplementary relay, and / or remote indicator, 2-wire and 4-wire applications.
- Signal source : Highly reliable LED light sources and photodiode sensors are used.
- The integrated wiring system was designed since 1990.

Specifications


- Input Voltage Range 16 V ~ 32 VDC (DC24V)
- Alarm Current 60 mA (MAX)
- Standby Current : 60 μ A average, 90 μ A peak @ 24VDC
40 μ A average, 60 μ A peak @ 16VDC
- Environmental Temperature 32 °F ~ 140 °F
- Relative Humidity 0 ~ 95%RH
- Sensitivity Nominally set at 10 % / 50 cm
- Aux. Relay Rating 0.5A @ 120 VAC / 1A @ 24 VDC

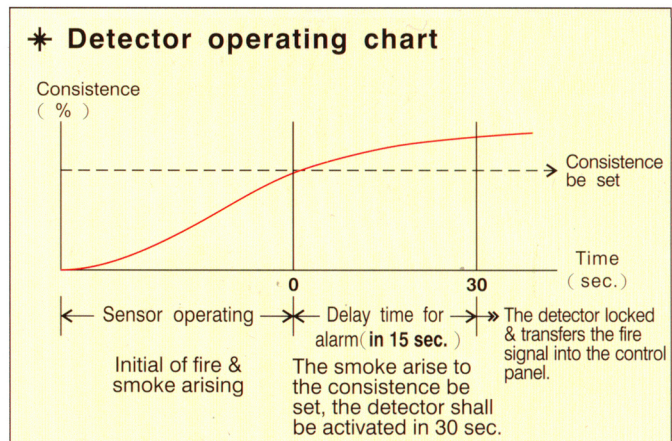

EFFECTIVE WARNING AREA			
Height above the ground	Below 4 M	4 ~ 8 M	8 ~ 15 M
Building	100 M ²	50 M ²	30 M ²

DETECTOR STRUCTURE			
Appearance	Weight	Diameter	Height
Ivory	170 g	10.6 cm	5 cm

Base Wiring Information

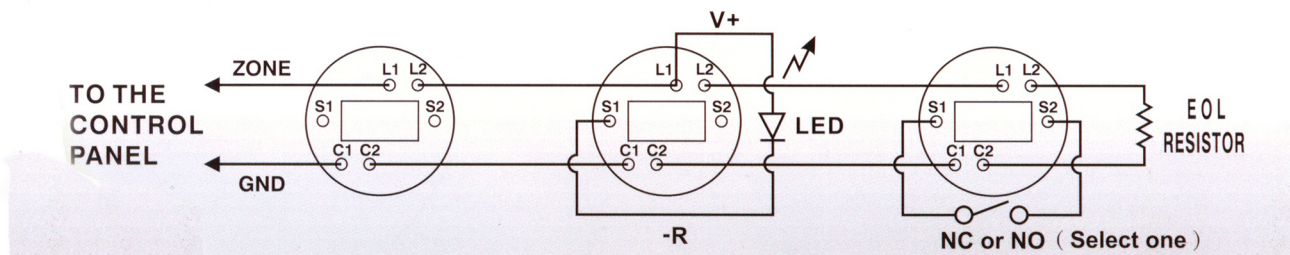

■ **NORMAL MODE**

■ **REMOTE INDICATOR**

■ **AUXILIARY CONTACTS**