

S-332

Bell 6"


Voltage 24 VDC



S-332

Features

- High efficiency low current consumption on 24 VDC motorized bells.
- Terminals will accept 2.5 mm cables.
- Simple installation via multi-fixing base plate for all types of location.
- Fitted with two series diodes for fault monitoring.
- 12 VDC bells are also available.

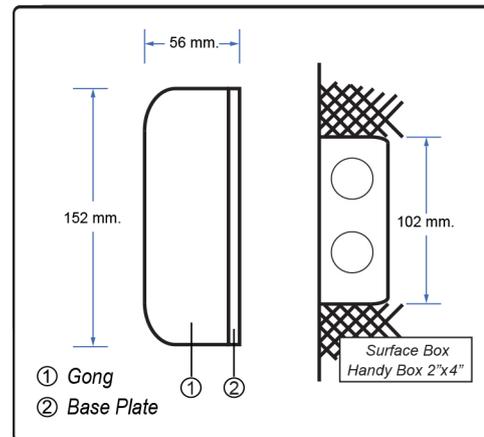

Specification

| | |
|-------------------|--|
| Model | S-332 |
| Voltage | 24V DC |
| Current | 25mA |
| Sound Output | 93dB @ 1M |
| Movement | Motor, Pinion and striker |
| Movement Features | DC Motor, acetal gear wheel, steel striker |
| Gong | Steel, secured with phillips screw |
| Base Plate | Molded black polycarbonate |
| Material | Steel plate |
| Dimensions | Ø 6" (152mm) x 56mm(H) |
| Weight | About 850g |