

Manual Call Point S-336

Type I 24V DC

Type II 220V AC



S-336




S-336 with base


Manual Station



Frontside



Backside

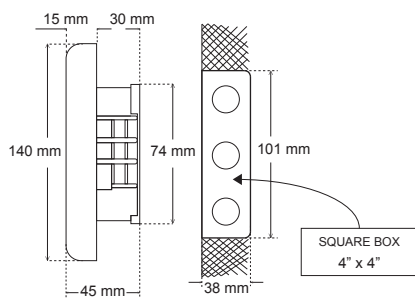

Features

- Emergency press alarm, immediately activates fire alarm signal.
- Indicator light above fire alarm push-button confirms the alarm signal transfer.
- There are a phone jack and reset button behind the cover cap.
- **Type I** (24V DC) is simultaneous dual loop (refer to Diagram 1).
- **Type II** (220V AC) is simultaneous dual signal transfer (refer to Diagram 2).
- Optional base is available.

Standard

Option of Available

Ⓐ : Manual Call Point S-336 (Made in Taiwan)

Ⓑ : Manual Call Point with Base (Made in Thailand)

Dimensions 140 mm. (Dia) x 65 mm. (H)

Type I (24V DC)




Diagram 1

Type II (220V AC)




Diagram 2

Specification

Model	S-336 Type I	S-336 Type II
Operating Power	24V DC	220V AC
Operating Contact	Max. 30V DC 500mA	Max. 220V AC 0.4A
Sub-function	Phone jack, confirmation LED, reset button.	
Material	Fire-proof plastic	
Dimensions	140 mm(Dia.) x 45 mm (H)	
Weight	About 160g	
Mounting	4" square electrical box	