
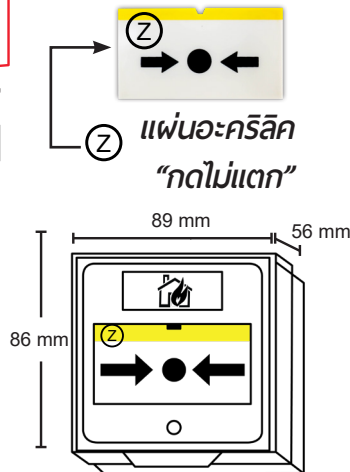


# Resettable Manual Call Point With Clear Cover

## U-611

สวิตช์กดแจ้งเหตุ  
โดยการกดด้วยมือ  
“แบบกดแผ่นอะคริลิกให้ทำงาน”  
รีเซ็ตได้

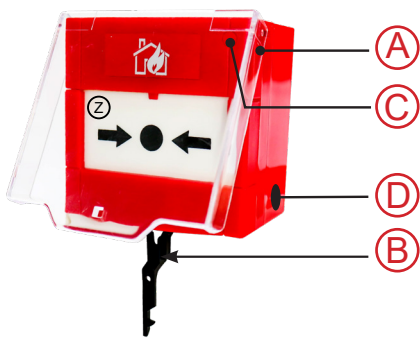

### Features

- Use for 12-24 VDC, 220 VAC
- Conventional Fire Alarm Accessories
- Resettable Manual Call Point
- Transparent Cover (Clear Cover)
- One Way Single Pole
- Two Way Double Pole **Optional**
- 4 Colors for **Optional**

**Standard** (A), (B), (A) : Resettable Manual Call Point With Clear Cover U-611

(B) : Test Manual by Key Test

**Optional** (C) : Resettable Manual Call Point With LED Indicating Lamp, Red Color (Made in Local)


**Optional** (D) : Resettable Manual Call Point With Key Switch (Made in Local)

### Specifications

| Model / Product    | U-611 / Resettable Manual Call Point With Clear Cover |         |
|--------------------|-------------------------------------------------------|---------|
| Input Voltage      | 12-24 VDC                                             | 220 VAC |
| Operating Current  | 2A                                                    | 5A      |
| Withstood Voltage  | 250 VAC                                               |         |
| Type / Color       | Resettable / Red Color                                |         |
| Alarm Output       | Contact One Way Single Pole                           |         |
| Weight / Dimension | 155 g. / 86 X 89 X 56 mm.                             |         |

### Wiring Diagram

#### Diagram for Fire Alarm System 24 VDC

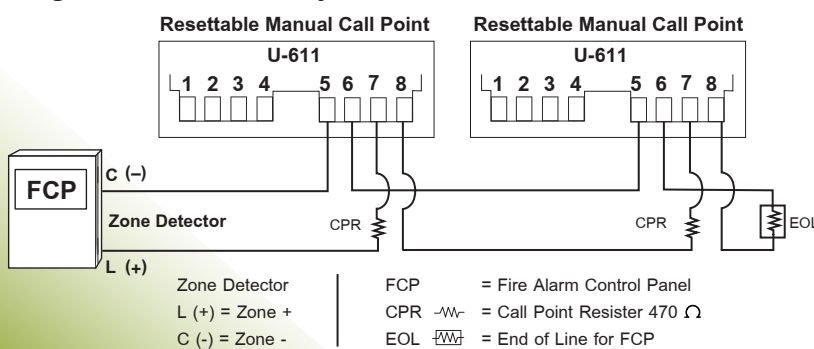

#### Diagram for 220 VAC

