




## FIRE ALARM CONTROL PANEL



# Fire Alarm Control Panel

## CL-2100E

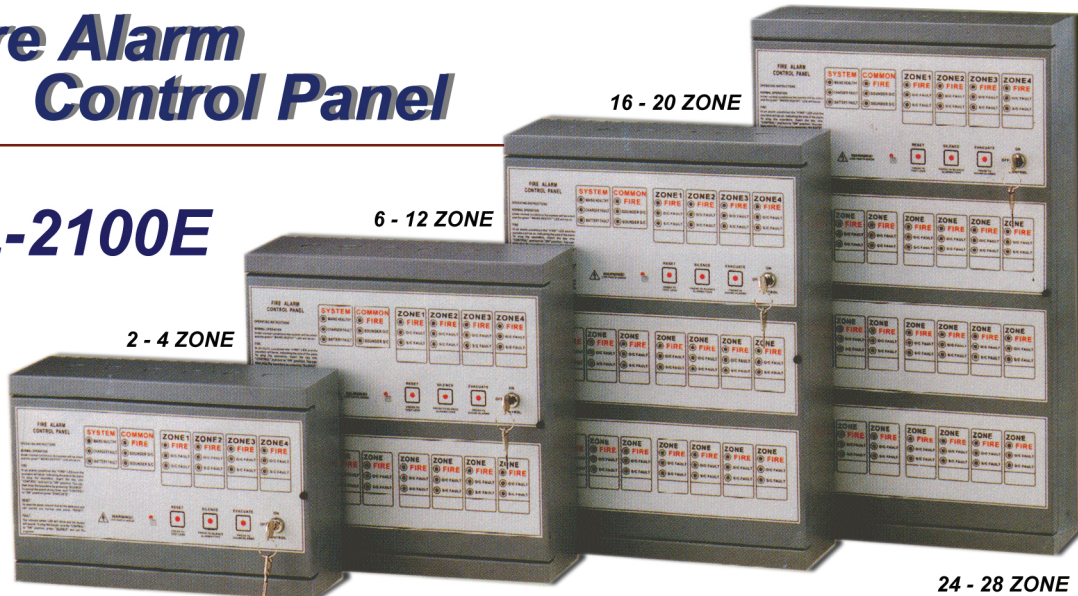

### Feature


- 2, 4, 6, 8, 12, 16, 20, 24, 28 zone
- Zoned Visual Red Alarm and Yellow Trouble Indicators.
- Continuous Signal During Alarm.
- Built-In Battery Charger.
- Low / No Power and Battery Detection.
- Automatic Loading and Testing of Battery.
- Battery Lead Reversal Protection.
- Evacuate (Alarm Resound).
- Led Test.

### Electrical

- Mains Supply : 220V AC 50 / 60 Hz $\pm$  10%
- Battery Voltage : 24V DC
- Charging Voltage Protection : 1.6Ah Glass Fuse
- Sounder Output : 24V Nominal EOL 10 K resistor
- Auxiliary Contacts : 30V DC 14 max. NC / NO
- Mains Supply Protection : Glass Fuse
- Sounder Protection : 2 x 500mA Glass Fuse
- Reverse Battery Protection : Charger Glass Fuse
- Zone EOL (4 - 28 zone) : 5.6 K Resistor

### Dimension

- 2, 4 Zone : 200 x 302 x 92 m.m.
- 6, 8, 12 Zone : 307 x 302 x 102 m.m.
- 16, 20 Zone : 412 x 302 x 112 m.m.
- 24, 28 Zone : 517 x 302 x 112 m.m.

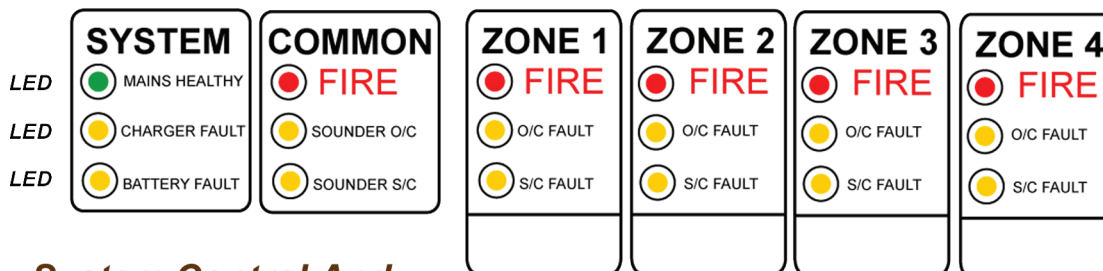

### System Control And Indicator On Board

