


QA Series

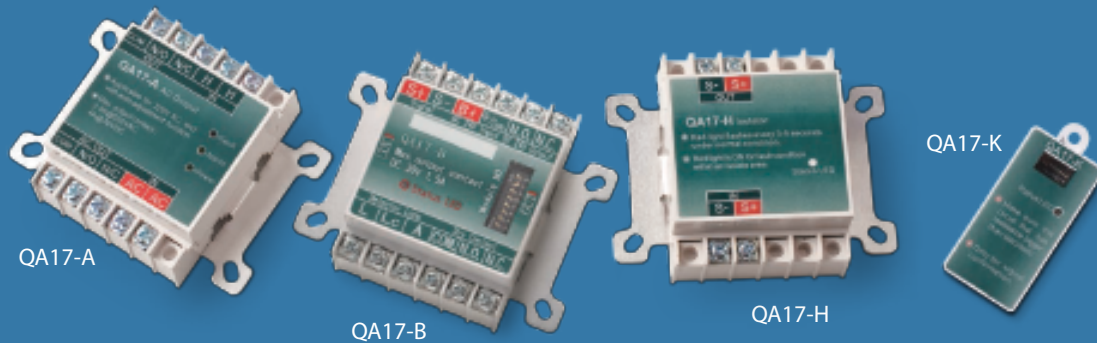

Module Series

Characteristics

- Low power consumption in monitoring mode, high stability.
- Easy installation, either single module installation or several modules installed on a special mounting bar. Implanted type gang box is available to suit the decoration design.
- The Module is designed with separate input and output contacts to decrease the difficulty of moving external wiring.
- Control Module QA17-B is designed to control input & output for all kinds of systems. (fire alarm, smoke evacuation, sprinkler, foam, winding door...etc.)
- Output module QA17-A can directly connect with power source. The output voltage from N.O. & N.C. will be the same as input voltage.
- Monitor module QA17-K is designed to monitor security condition, such as water supply, pump action ...etc.

Specifications

Model	QA17-A	QA17-B	QA17-H	QA17-K
Type	Output Module	Control Module	Isolator Module	Monitor Module
Purpose	Supply higher current such as evacuation	Input & Output for all systems	Isolate from control unit when external fault	Confirmation of external signal
System Connected	Series with QA17-B	Series with conventional detector	Series with all system zone	Receive activation signal from external device
Input Source	24VDC / 110VAC / 220VAC	Loop signal	Zone short circuit	Activation signal
Output Contacts/Load	COM. N.O. N.C. 4A @30VDC, 2.5A @ 250VAC	1 in 2 out COM. N.O. N.C. 1.5A @30V DC	N/A	N/A
EOL Resistor	N/A	10kΩ	N/A	10kΩ
Address Coding	N/A	Binary	N/A	Binary
Dimensions (mm) H x W x D	60 x 76 x 31			55 x 27 x 16
Ambient Temp.	0°C ~ +50°C			
Material	Fire-proof plastic			
Color	Green			

Agent In Thailand : U.P.TECH CORPORATION CO.,LTD

28 Soi Rattanathibet 28 Yaek 2 Bangkrasor Muangnonthaburi
Nonthaburi 11000 Thailand

LINE : 0863133492 **Tel** : 02-965-7701-6, 086-355-6781

Email : sales@up-t.com **Email** : admin@up-t.com

Website : www.alarmthailand.com , www.firealarmonline.com

HORING LIH INDUSTRIAL CO., LTD.

4F., No. 18, Lane 327, Chung Shan Road, Sec. 2, Zhonghe District 235, New Taipei City, **Taiwan**

Tel : +886 2 22487599 **Fax** : +886 2 22407752 **Email** : export@horingli.com **Website** : www.horingli.com